

HOME TRAINING IN CABINET WORK: PRACTICAL EXAMPLES IN STRUCTURAL WOOD WORKING: EIGHTEENTH OF THE SERIES

SAW-HORSE TABLE



THIS table, which is the fourth rustic piece shown in this department, is designed for use in a cottage or for a porch—so that when the table is not required for use, the top can be taken off and the horses placed together, taking up very little space. The table-top needs to be splined and glued up—made from very dry lumber, and the three braces, one at the center and one at each end, are driven in from the sides; they are then secured by screws, two in each board of the top and never glued. The well-made horses are the same rustic construction as the other pieces in this series and need no further explanation.



MILL BILL OF STOCK FOR SAW-HORSE TABLE

Piece	No.	Long	Diameter
Legs	8	28 in.	3 in.
Short stretcher	4	16 in.	3 in.
Long "	2	36 in.	2½ in.
Top of horse	2	44 in.	6 in.
Braces for top	3	49 in.	4 in. wide
Top	1	96 in.	24 in. wide


HOME TRAINING IN CABINET WORK

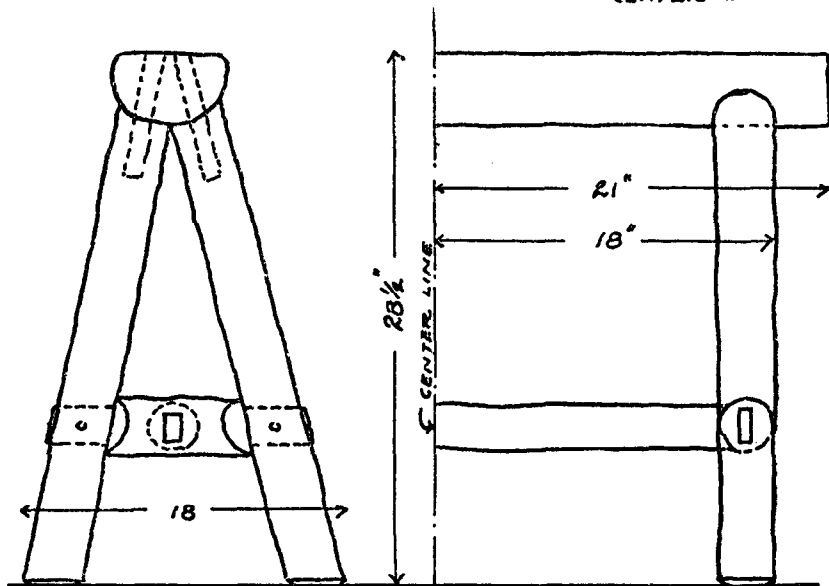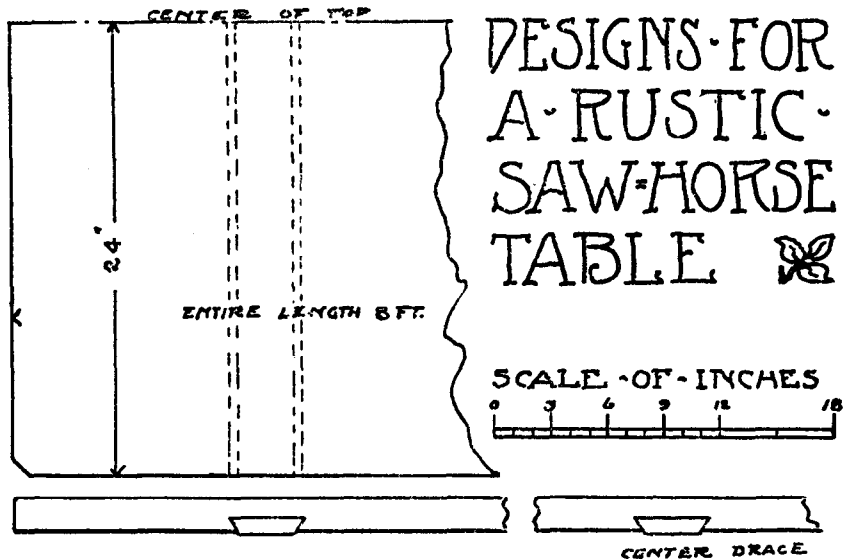

HOME TRAINING IN CABINET WORK

LOW RUSTIC LOUNGE


THIS piece is similar in construction to the others of the series. The tops of the ends, which are of equal height, are hewn down so as to leave a smooth surface for the arm or hand to rest upon. The seat-slabs may be slightly hewn so that the seat-cushion will lie smoothly and be a comfortable resting-place.

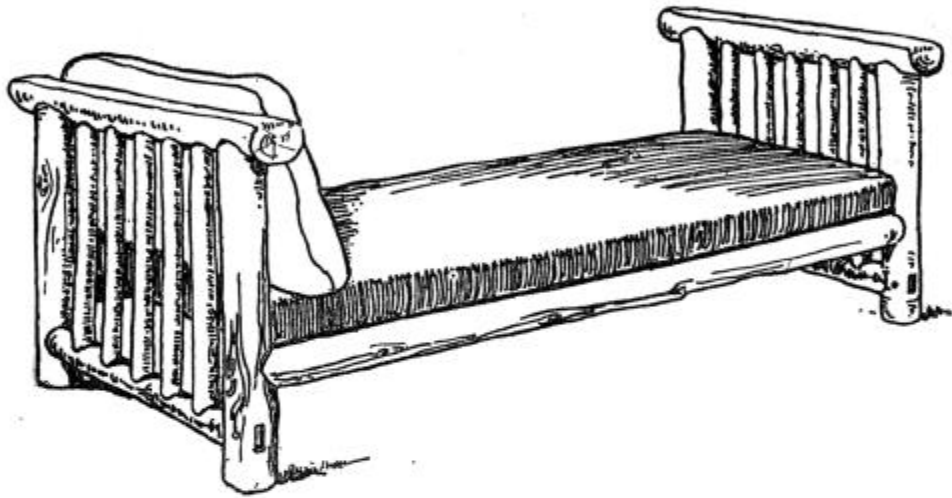

MILL BILL OF STOCK FOR RUSTIC LOUNGE

Piece	No.	Long	Diameter
Posts	4	37 in.	4 in.
Top of ends	2	42 in.	5 in.
Lower brace ends	2	38 in.	4 in.
End uprights	10	30 in.	3 in.
Side rails	2	85 in.	4 in.
Seat-slabs	16	34 in.	3 in.

HOME TRAINING IN CABINET WORK

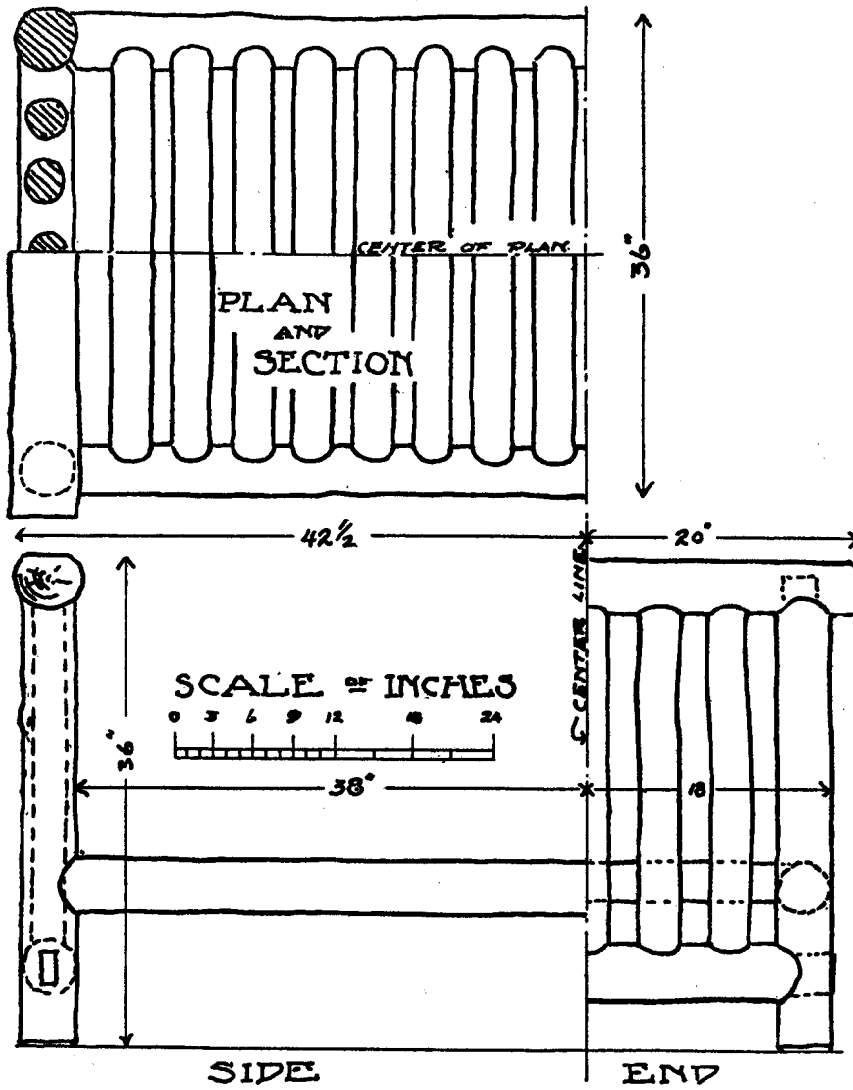


DESIGN FOR A RUSTIC LOUNGE

HOME TRAINING IN CABINET WORK

NOVEL RUSTIC BED



THIS rustic bed is decidedly novel in appearance—its head and foot are both low and of exactly the same height. The high head came to be used in order to make more elaboration in the way of design, and rustic furniture pre-eminently should be simple. The side rails of the bed are to be tenoned and pinned, the pins being left long so that they can be driven out and the bed taken down. The rails have cleats for the springs to rest upon and the bed should be as comfortable as any in the house; a flat bolster would be used in place of pillows and the cover-lid would be of plain Craftsman linen.

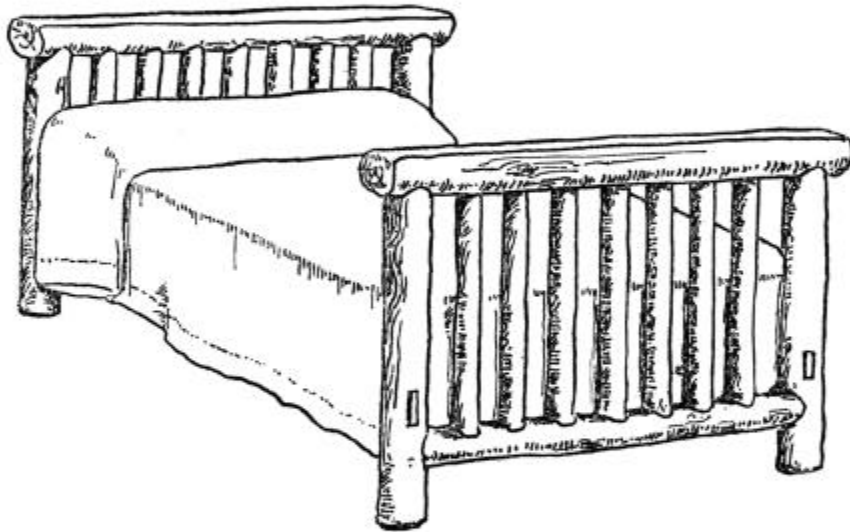

MILL BILL OF STOCK FOR RUSTIC BED

Piece	No.	Long	Diameter
Posts	4	42 in.	4 in.
Top of ends	2	60 in.	5 in.
Lower rail in ends	2	56 in.	4 in.
End uprights	14	34 in.	3 in.
Side rails	2	88 in.	5 in.

HOME TRAINING IN CABINET WORK

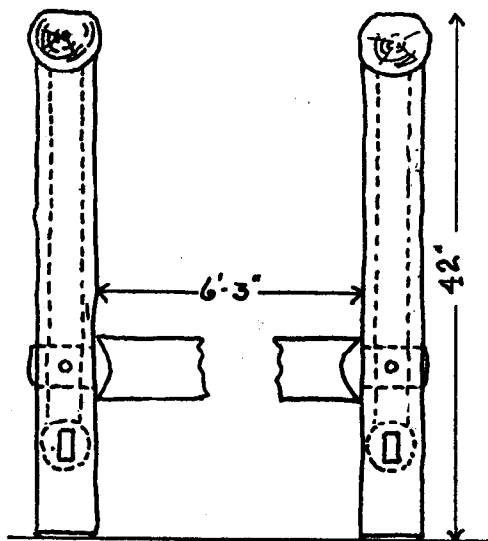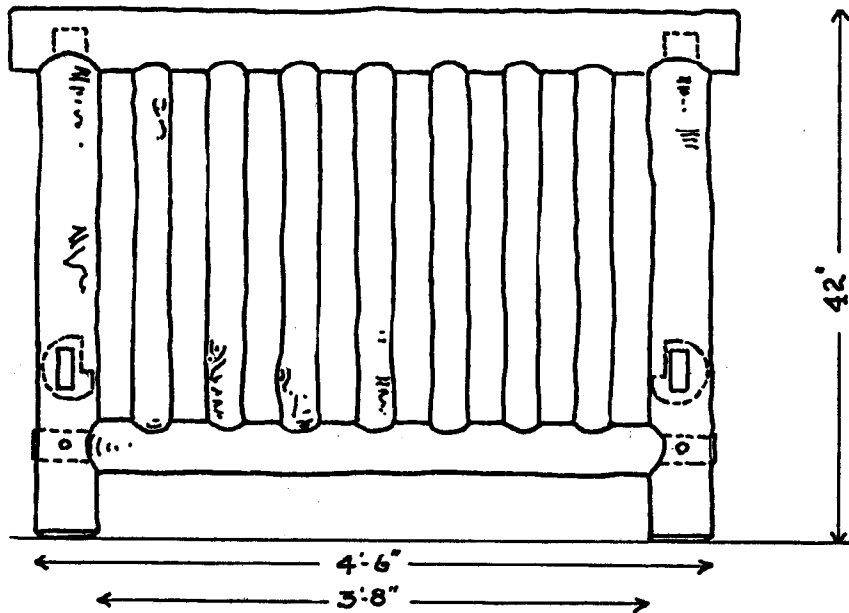

DESIGN FOR A
RUSTIC BED

HEAD AND
FOOT OF
BED ARE
TO BE EX-
ACTLY ALIKE

